


FLAMSKYDDAD  
MARKISVÄV

SANDATEX




6015/300

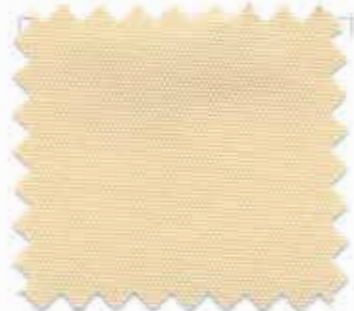


6015/301




6090/300



6929/300

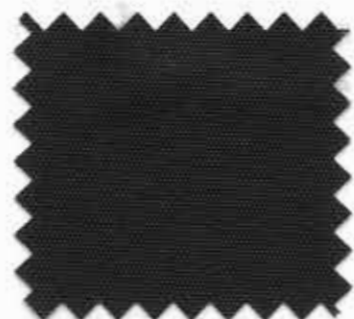

6930/300



6079/300



6097/300



6024/300



6012/300



6011/300



6073/300




6008/300



6416/300



6092/300

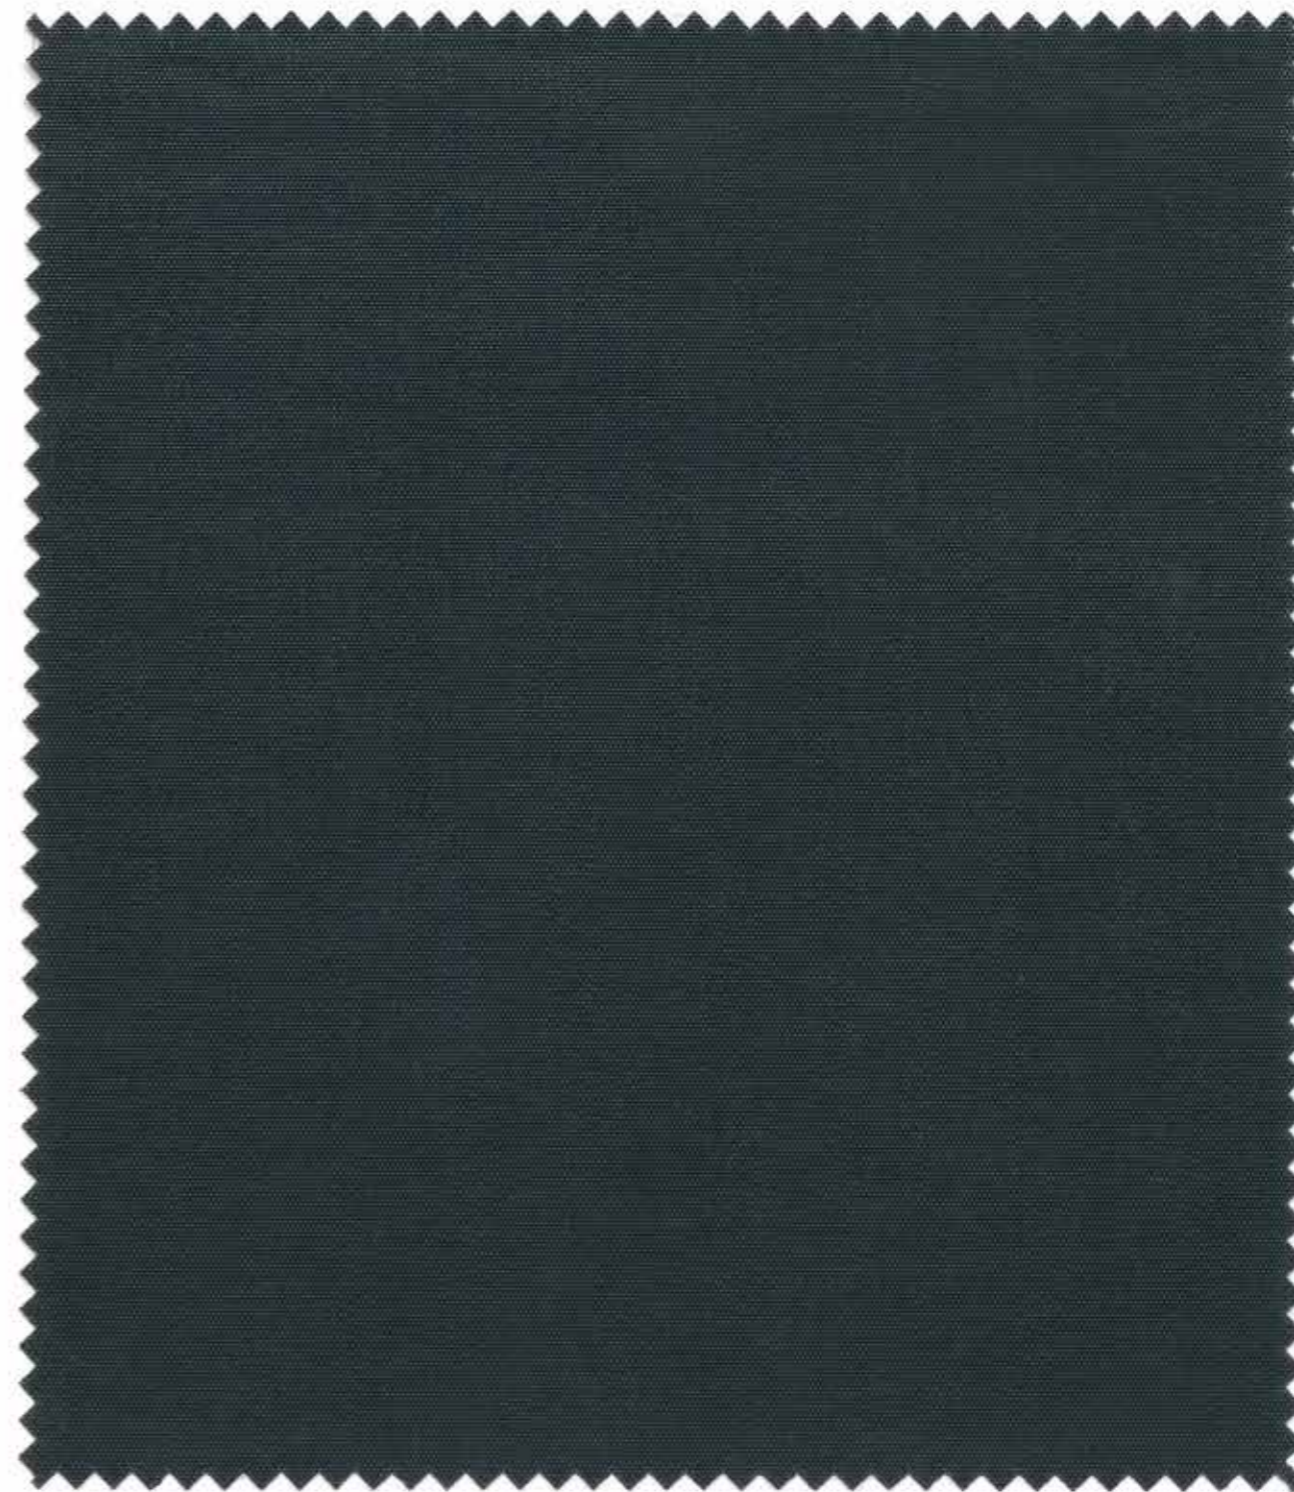

6097/300

#### TEKNISK INFORMATION

Komposition 100% spinnfärgad polyester.  
 Bredd 152 cm  
 Stycklängd 60 m  
 Vikt 300 g/m<sup>2</sup> (+/-5%)  
 Ljushärdighet 4/5 - på 5 gradig gråskala (1000 tim).

Beläggning Teflon. Smuts-, olje- och vattenavvisande.  
 Vattenpelare ≥350 mm  
 Brandklassificering B1 och klass 1.